

Augers

for Skid Steer, Multi Terrain, Compact Track and Compact Wheel Loaders



Hydraulically driven augers for boring holes in a wide variety of soil conditions for fence posts, street lights, building foundations and tree planting.

Features

- A14B 'Direct Drive' auger
- A19B and A26B planetary drive unit
- Larger diameter internal shaft and stout hub design
- High efficiency Danfoss motor
- Reduced cylindrical housing diameter


Benefits

- Improved performance, reliability and serviceability.
- Superior shaft retention in rough digging conditions.
- Improved durability.
- Higher torque for greater digging.
- Housing can enter hole for increased digging depth.

A14B, A19B, A26B Augers

Specifications and Dimensions

		A14B	A19B	A26B
A Overall Width with Bracket	mm	1152	1152	1152
B Overall Length with Bracket	mm	598	598	598
C Overall Drive Unit Height	mm	1020	934	978
D Housing Diameter	mm	252	252	252
E Swing Range		102°	102°	102°
Drive Unit Weight with Hydraulic Lines	kg	101	75	91
Mounting Frame Weight with Clevis	kg	91	91	91
Total Weight without Bit	kg	192	168	182
Drive Method				
A14B: Direct Drive				
A19B: Single Planetary Reduction 4.5:1				
A26B: Gear Double Planetary Reduction 34:1				
Maximum Hydraulic Flow	L/min	83	83	130
Maximum Hydraulic Pressure	bar	235	235	290
Motor Size	cm ³	630	250	440
Effective Displacement	cm ³	629	250	440
Drive Shaft Torque at Max Pressure	Nm	2304	4118	6828
Bit Speed at Max Flow	rpm	127	71	81
HEX Output Shaft Size	mm	51	51	51

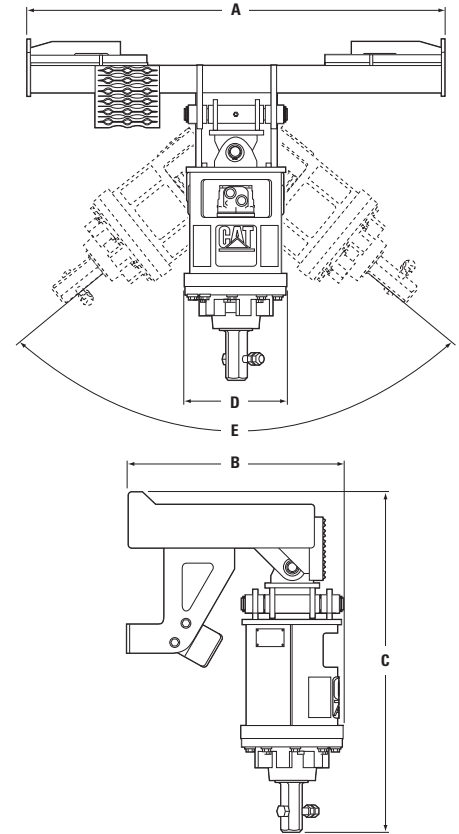

Hydraulic Requirements

A14B/A19B – Standard flow hydraulics and no electrics.

A26B – High flow hydraulics and no electrics.

Matching Guide

Auger	Skid Steer Loaders	Multi Terrain Loaders	Compact Track Loaders	Compact Wheel Loaders
A14B	216B, 226B, 232B, 236B, 242B, 252B, 246C, 256C, 262C, 272C	247B, 257B, 277C, 287C, 297C	279C, 289C, 299C	906H, 907H, 908H
A19B	216B, 226B, 232B, 242B, 236B, 252B, 246C, 256C, 262C, 272C	247B, 257B, 277C, 287C, 297C	279C, 289C, 299C	906H, 907H, 908H
A26B	246C, 256C, 262C, 272C	277C, 287C, 297C	279C, 289C, 299C	906H, 907H, 908H

Auger	Auger Bit (inch/mm)	Tree Bit (inch/mm)
A14B	6/152, 9/229, 12/305, 18/457, 24/610, 30/762, 36/914	24/610
A19B	6/152, 9/229, 12/305, 18/457, 24/610, 30/762, 36/914	24/610, 36/914
A26B	6/152, 9/229, 12/305, 18/457, 24/610, 30/762, 36/914	24/610, 36/914

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

HEHX3171-4 (10/2008) hr

© 2007 Caterpillar -- All Rights Reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Caterpillar dealer for available options.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the POWER EDGE™ trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

CATERPILLAR[®]
TODAY'S WORK. TOMORROW'S WORLD.™